


Container hoogte


Max. Ah per plaat	H2	H1
60	387	402
80	447	462
90	522	537
125	612	627
155	769	784

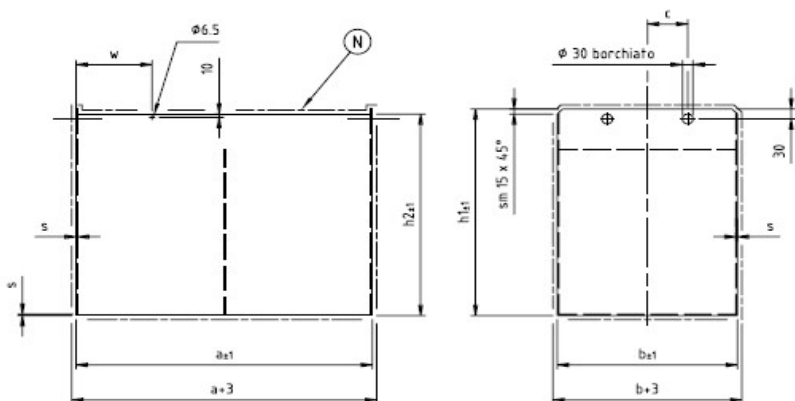

DIN 43535 - 24 Volt

Container breedte per type:


Plaat	A	B	C
2	162	209	303
3	216	281	411
4	270	353	519
5	327	425	627
6	378	497	741
7	432	569	849
8	486	641	957
9	543		
10	597		

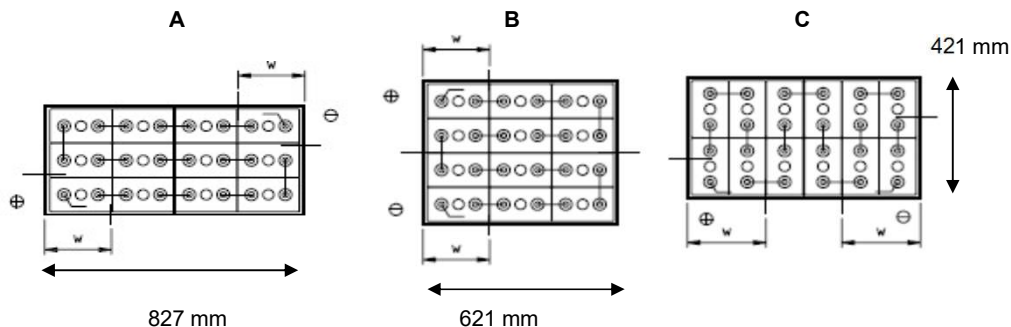

DIN 43531 - 48 Volt

Container breedte per type:


Plaat	A	B	C
2	303		
3	411	346	280
4	519	436	352
5	627	526	424
6	735	616	496
7	843	706	568
8	951	796	640

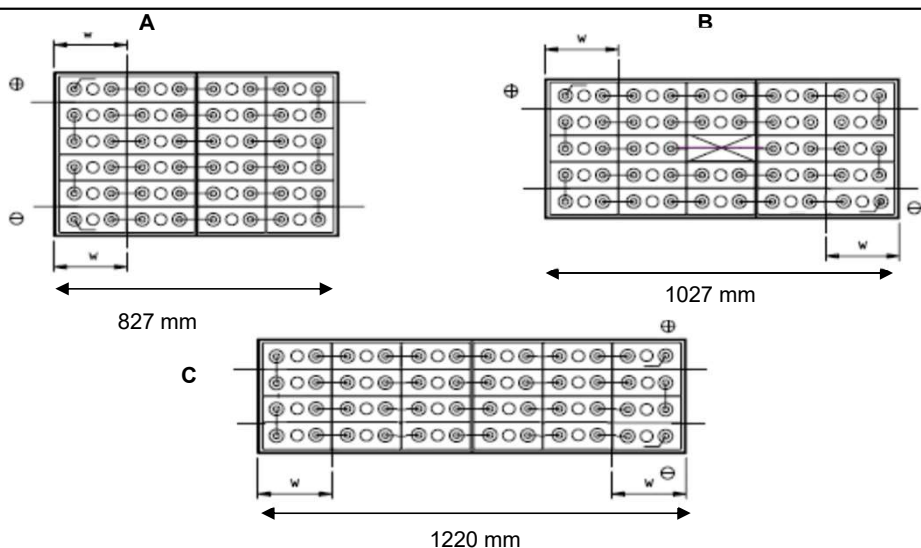

DIN 43536 - 80 Volt

Container breedte per type:

Plaat	A	B
2		513
3	564	693
4	708	873
5	852	1061
6	996	1210
7	1140	
8	1284	

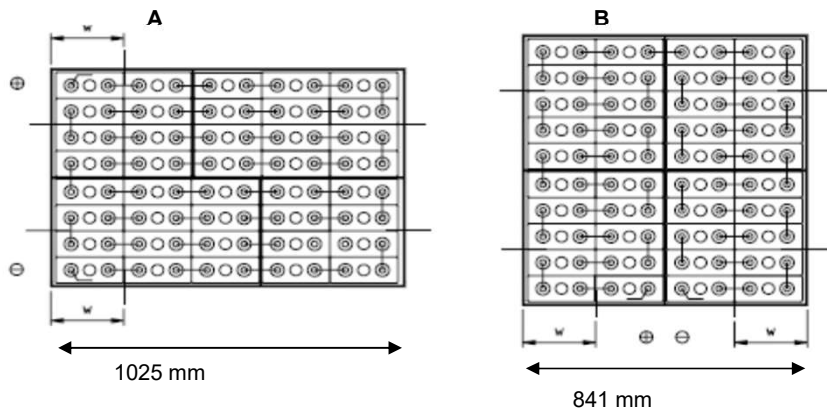

Bij de 48 en 80 volt types kunnen de breedte en lengte maten enkele mm afwijken bij de hogere celtypes. Alle maten zijn in mm.

R&W Batterijen

Bellstraat 8
67116 BA Ede
www.r-w.nl

Tel. +31 (0)318 - 69 00 88
Fax +31 (0)318 - 69 02 36
@ info@r-w.nl

IBAN nr. NL59 RABO 0139 2276 52
KvK nr. 09087929
BTW nr. NL 803880212 B01

